


Fixed Bridge Scraper

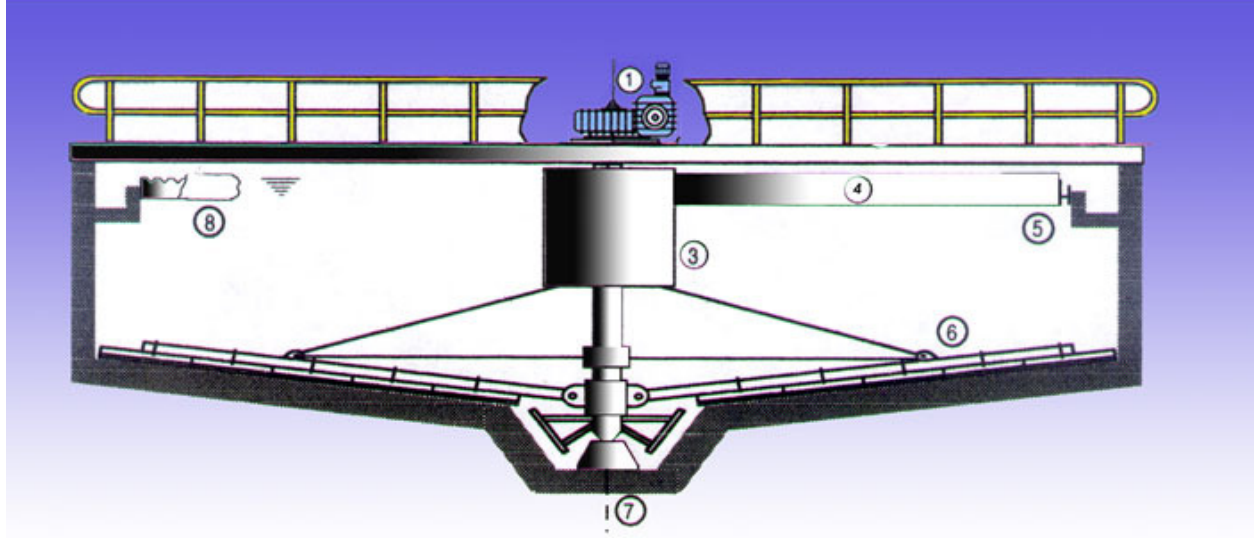

PARTS

- 1- DRIVE UNIT (MOTOR + REDUCER)
- 2- FIXED BRIDGE
- 3- DEFLECTOR
- 4- SURFACE SCRAPER
- 5- SURFACE SCRAPER HAVING ARM
- 6- BOTTOM SCRAPER ARM
- 7- BOTTOM BED
- 8- WEIR & SUBMERSIBLE PLATE

MATERIALS

- AISI 304
- AISI 316
- ST 37 & Epoxy Cuatting

The system operates on a fixed bridge. The bridge can be steel or concrete. In case the client wishes to construct the steel or concrete fixed bridge by himself, necessary dimensions can be provided by our company. Functions like thickening, sweeping the sludge from the tank periphery to the central cone, mixing the bottom cone or scraping, are realized by means of a shaft and drive unit (motor+reducer). Drive unit is a compact group consisting of double staged helical screw gears. Torque limiter is a protective device against over torques as a standard. In case of presence of moment values that are not affordable by the grive group, a limit switch is activated and cuts off the energy. Alarm signals shall be provided upon request.

FIXED BRIDGE SCRAPER DIMENSIONS TABLE

TYPE OF THICKENER	CFS 2.5...6	CFS 6...9	CFS 9...14	CFS 14...17	CFS 17...20	CFS 20...22
TANK DIAMATERN (m)	2.5...6	6...9	9...14	14...17	17...20	20...22
MOTOR POWER (kW)	0.25	0.37	0.55	0.55	0.75	1.1
APPROX. WEIGHT (kg)	400-800	800-1200	1200-1650	1650-1950	1950-2650	2650-3000
PERIPHERICAL SPEED	min. 2 cm/sec			max. 6 cm/sec.		

ÇEVTAŞ ÇEVRE TEKNOLOJİSİ TİC ve SAN A.Ş
Bağdat Cad. 100.Yıl Apt.78/13 Küçükyalı
34840 İSTANBUL / TÜRKİYE

Tel: +90 216 489 12 58-59
Fax: +90 216 388 74 00, +90 216 489 62 70
E-mail : cevtas@cevtas.com.tr



ÇEVTAŞ ÇEVRE TEKNOLOJİSİ TİC ve SAN A.Ş
Bağdat Cad. 100.Yıl Apt.78/13 Küçükyalı
34840 İSTANBUL / TÜRKİYE

Tel: +90 216 489 12 58-59
Fax: +90 216 388 74 00, +90 216 489 62 70
E-mail : cevtas@cevtas.com.tr

